
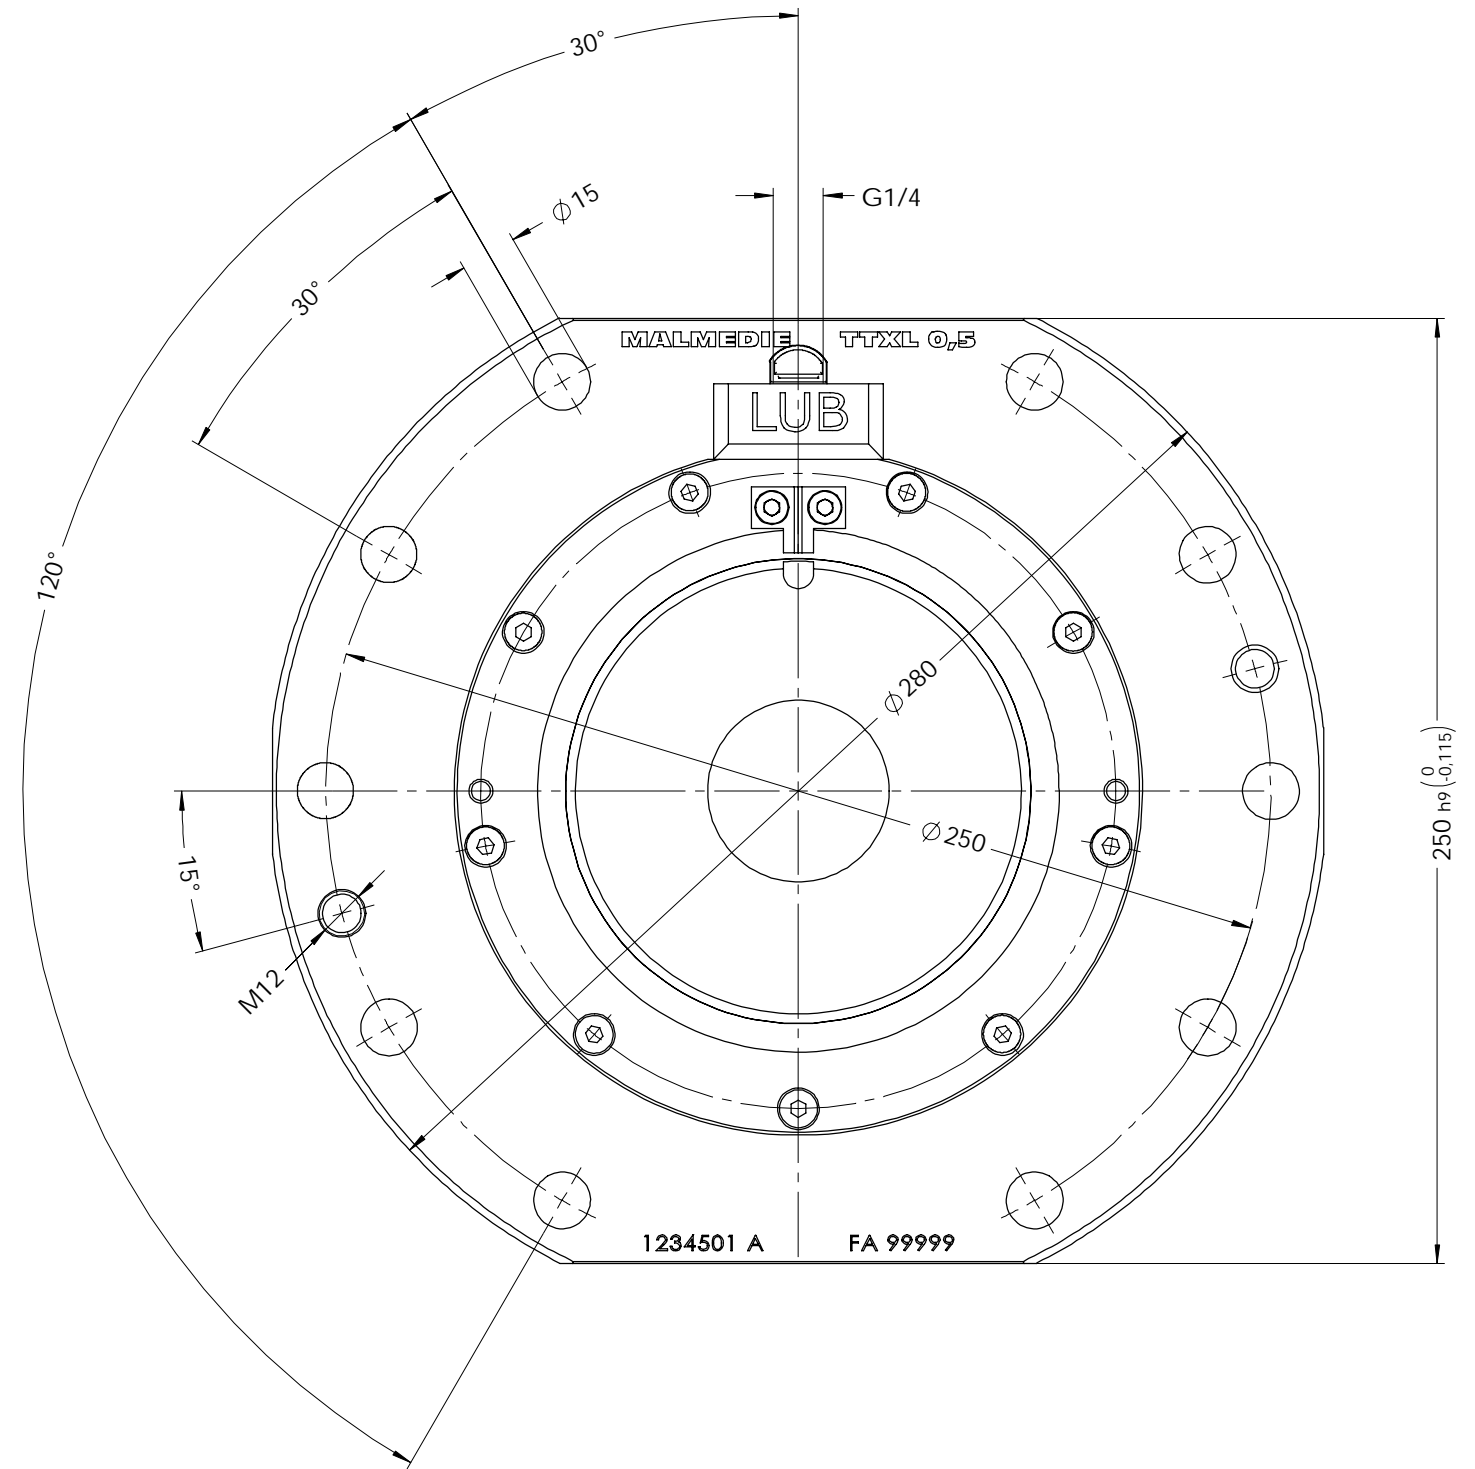


max. zul. Drehmoment $T_{k \max} = 9500 \text{ Nm}$
 MAX. PERMISSIBLE TORQUE
 max. zul. Radialkraft $F_{r \max} = 22500 \text{ N}$
 MAX. PERMISSIBLE RADIAL LOAD

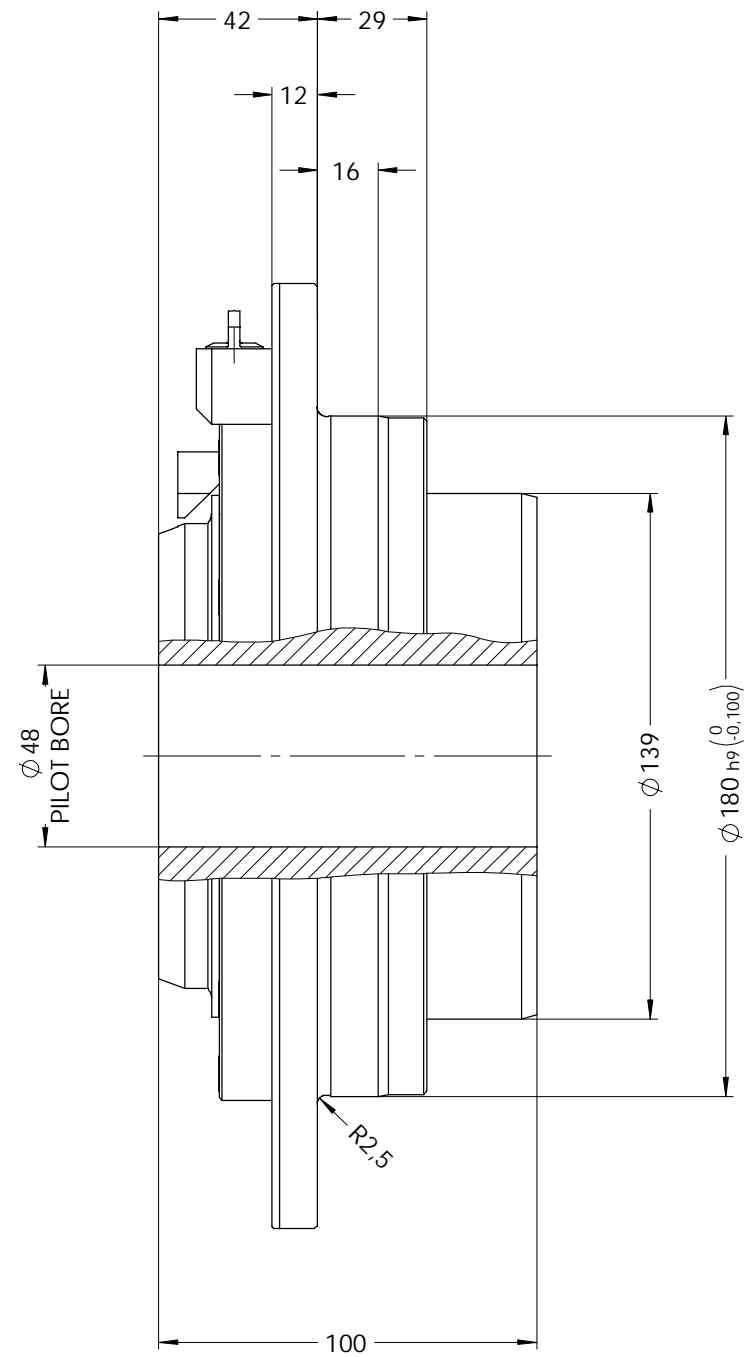

Oberflächen nach DIN ISO 1302 Indication of surfaces to DIN ISO 1302 Werkstückkanten DIN6784 Edges of working parts DIN6784 	 Dycker Feld 28 42653 Solingen Phone: +49 (0) 212 / 258 11 - 0 Email: info@malmedie.com Internet: http://www.malmedie.com	Werkstoff / Material	Gewicht / Weight ca.
		-	16,8 kg
Allgemeintoleranzen nach ISO 2768-mH General tolerances to ISO 2768-mH Schutzvermerk DIN 34 beachten Interlectual property rights according to DIN34	Tonnenkupplung / DRUM COUPLING	Zugfestigkeit XXX - XXX N/mm ² Mindeststreckgrenze XXX N/mm ²	Mass moment of inertia
		0,5	0,093 kgm ²
Benennung / Designation	Datum / Date	Name	Format Size
Erstellt für Supersedes	07.02.2022	Zimmerle	A3
Ersetzt durch Superseded by	-	-	1 / 1
Ursprung Origin	Norm Stand	-	Maßstab Scale
Zeichnungs-Nr. / Drawing-No.:		And. Index	
665002		A	
1:2		Projection ISO 128	