
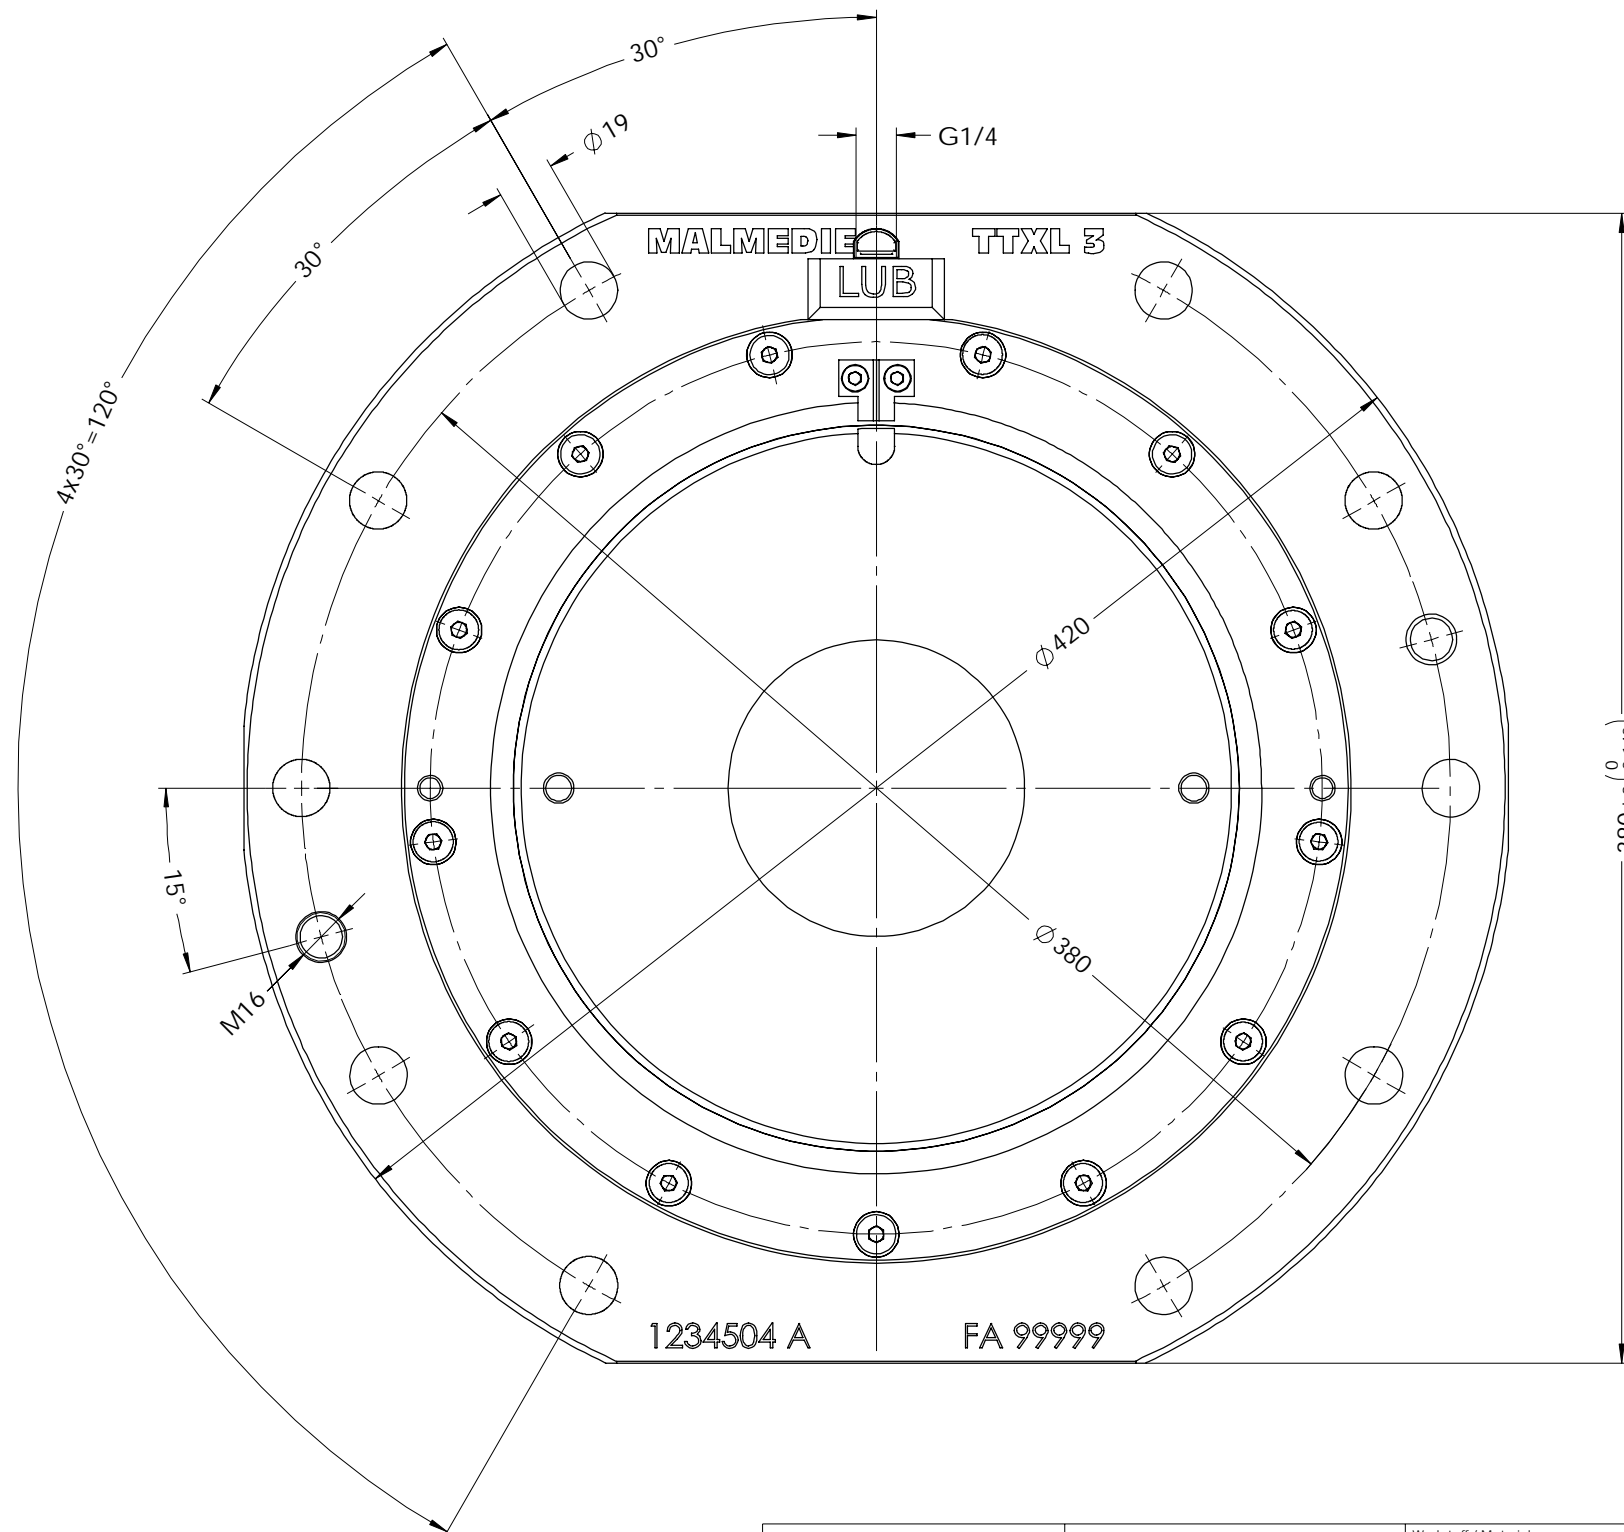


max. zul. Drehmoment  $T_{k \max} = 64000 \text{ Nm}$   
 MAX. PERMISSIBLE TORQUE  
 max. zul. Radialkraft  $F_{r \max} = 61000 \text{ N}$   
 MAX. PERMISSIBLE RADIAL LOAD

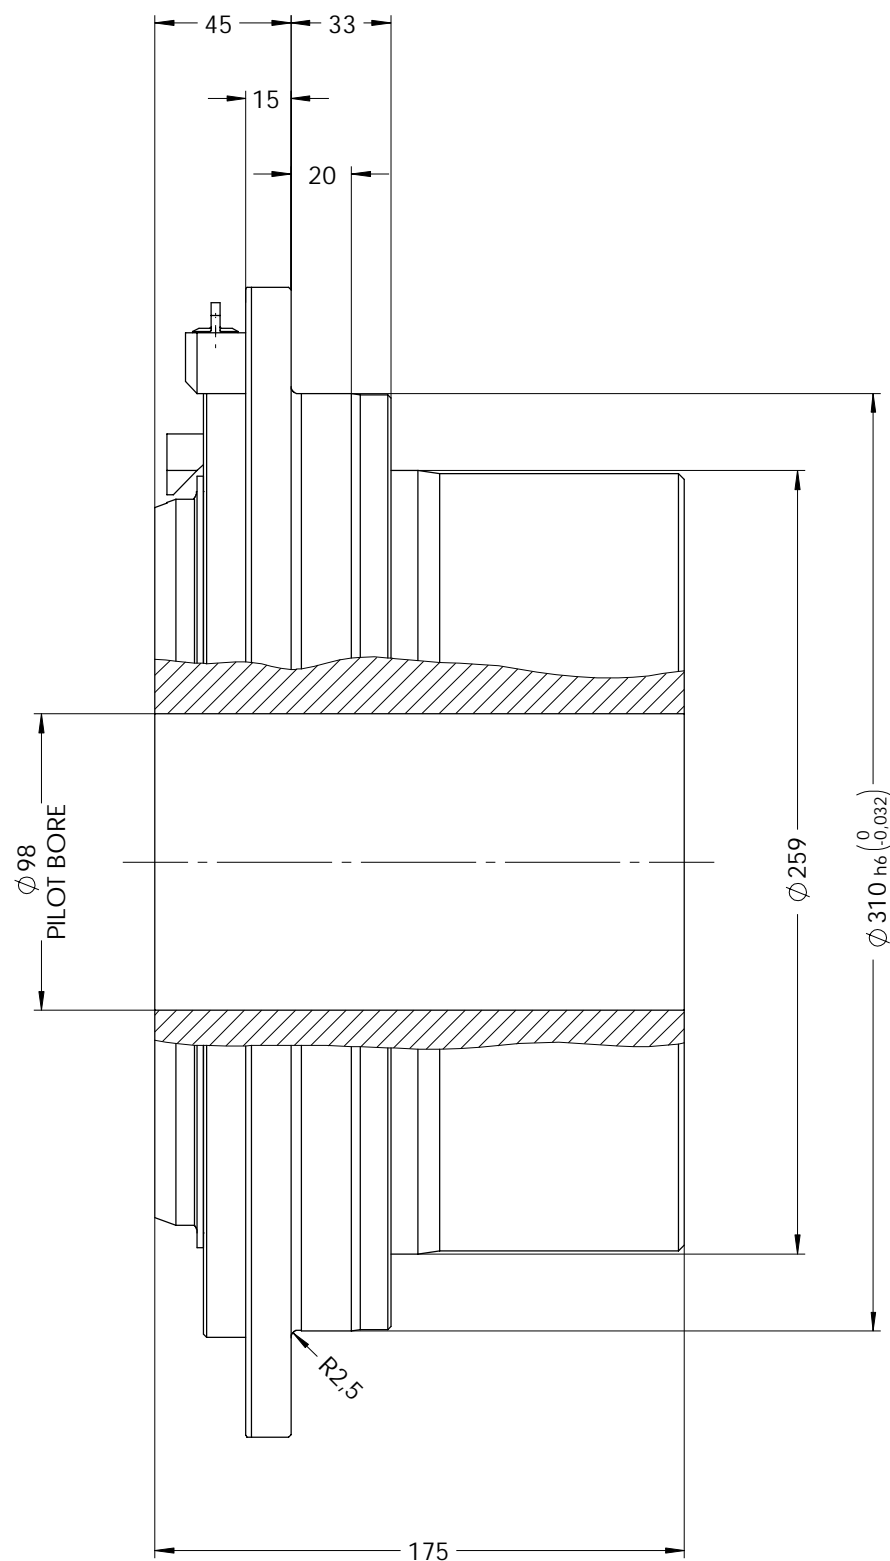

Oberflächen nach DIN ISO 1302 Indication of surfaces to DIN ISO 1302 Werkstückkanten DIN6784 Edges of working parts DIN6784 	 Dycker Feld 28 42653 Solingen Phone: +49 (0) 212 / 258 11 - 0 Email: info@malmedie.com Internet: http://www.malmedie.com	Werkstoff / Material	-	Gewicht / Weight ca.	76,4 kg	
		Zugfestigkeit	- - - N/mm <sup>2</sup>	Mass moment of Inertia	0,988 kgm <sup>2</sup>	
Mindeststreckgrenze - N/mm <sup>2</sup> Größe / Size Ausführung / Type	3	TTXL				
Benennung / Designation <b>Tonnenkupplung / DRUM COUPLING</b>						
Allgemeintoleranzen nach ISO 2768-mH General tolerances to ISO 2768-mH		Datum / Date	Name	Format Size	Zeichnungs-Nr. / Drawing-No.:	And. Index
Ersatz für Supersedes	-	07.02.2022	Zimmerle	A3	665008	A
Ersatz durch Superseded by	-	-	-	1 / 1	Maßstab Scale 1:2	Projection ISO 128
Ursprung Origin	-	-	-	1 / 1	1:2	Projection ISO 128